


Intumescent Door Hardware Protection - 1mm

Fire doors often have a wide range of door hardware installed on them. When hardware is installed it reduces the integrity of the door and/or frame and the void/ material that is removed to install/mortice a product then needs replacing with intumescent around the hinges and latches/locks in order to stop the spread of fire through a door. Failure to install this protection will invalidate the certification.

1mm intumescent is suitable for protecting fire doors for up to 30 minutes.

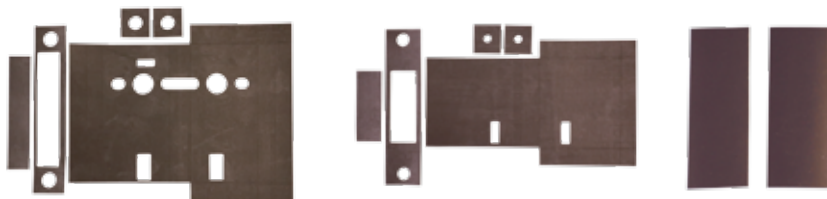

SKU	Description	Thickness	Size	Package Type	Qty
TU1110	Hinge Pads	1mm	100mm x 30mm	Trade Packed	6
TU1111	Hinge Pads	1mm	75mm x 19mm	Trade Packed	6
TU1120	Hinge Pads, Radius Corners	1mm	100mm x 30mm	Trade Packed	100
TU1112	3L Sashlock OR Bathroom Lock	1mm	64/76mm	Trade Packed	1
TU1114	3L Deadlock	1mm	64/76mm	Trade Packed	1
TU1130	BS 5L Sashlock	1mm	64/76mm	Trade Packed	1
TU1131	BS 5L Deadlock	1mm	64/76mm	Trade Packed	1
TU1113	Euro Sashlock	1mm	64/76mm	Trade Packed	1
TU1115	Euro Deadlock	1mm	64/76mm	Trade Packed	1
TU1116	Tubular Latch	1mm	64/76mm	Trade Packed	1
TU1117	HD Tubular Latch OR Tubular Deadbolt	1mm	64/76mm	Trade Packed	1
TU1127	Universal Din Lock	1mm	165mm x 85mm	Trade Packed	1

KEY FEATURES:


- 1mm Graphite Intumescent Protection
- Self-adhesive backing for easy fitting
- Expands in a fire to fill any gaps
- Helps to seal voids/ mortices
- Protects fire doors for up to 30 minutes



Intumescent Door Hardware Protection - 2mm

Fire doors often have a wide range of door hardware installed on them. When hardware is installed it reduces the integrity of the door and/or frame and the void/ material that is removed to install/mortice a product then needs replacing with intumescent around the hinges and latches/locks in order to stop the spread of fire through a door. Failure to install this protection will invalidate the certification.

2mm intumescent is suitable for protecting fire doors for up to 60 minutes.

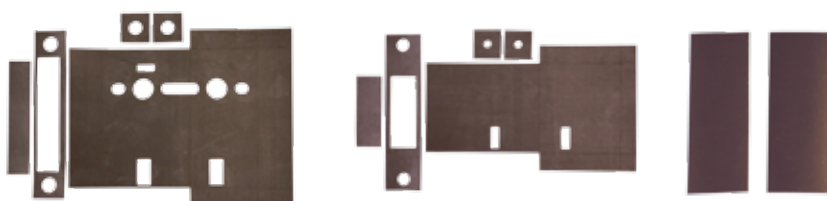

SKU	Description	Thickness	Size	Package Type	Qty
TU1119	Hinge Pads	2mm	100mm x 30mm	Trade Packed	100
TU1128	Hinge Pads	2mm	100mm x 30mm	Trade Packed	6
TU1125	Universal Din Lock	2mm	165mm x 85mm	Trade Packed	1
TU1126	Universal Flush Bolt	2mm	150/200mm	Trade Packed	1
TU1132	BS 5L Sashlock	2mm	64/76mm	Trade Packed	1

KEY FEATURES:

- 2m Graphite Intumescent Protection
- Self-adhesive backing for easy fitting
- Expands in a fire to fill any gaps
- Helps to seal voids/ mortices
- Protects fire doors for up to 60 minutes



SPÄRKA®

SPÄRKA are enabling compliance for all fire doors. Contact us for expert advice on any intumescent requirements.